



**GOVERNMENT DENTAL COLLEGE, ALAPPUZHA**

**GOVT. T.D. MEDICAL COLLEGE CAMPUS**

**VANDANAM. P.O – PIN – 688005**

**Phone- Principal: 0477-2280501**

**Office: 0477 -2280502**

**Fax: 0477-2280503**


**E-mail:-principalgdcalappuzha@gmail.com**

No. A/353/2017/GDCA

Dated, 27/05/2024

**LETTER OF INTEREST**

Sub: - GDCA-Accounts– Letter of interest is invited for the dismantling and Reinstallation of existing 4-Pole Structure and connect works of Government Dental College Phase II Alappuzha. Interested person/Firm should letter of interest on or before 3 pm of 30/05/2024 details of items and Description are enclosed herewith.

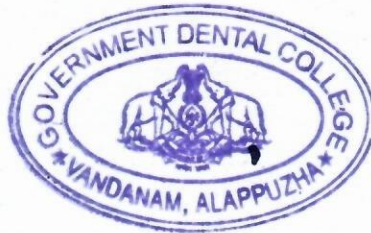

*Rengan*  
*30/5/24*

**Principal (i/c)**

## Four pole structure

Sl.No	Item Name	Specification
1	4 pole structure	Dismantling of all equipments /HT cable carefully from existing 4 pole structure and cutting the i section from the ground level
2	Reinstallation of four pole structure	<p>Reinstallation of four pole structure by cleaning of all metallic structure materials suitable painting and erection, testing &amp; commissioning of 11 Kv four pole structure using the dismantled ISMB poles and cross channels for supporting structure for 11 KV components ,11 KV pin disc and stay insulators ,supports and jumpers ,interconnecting conductors with OSWG copper ,25x 3mm braided copper earthing for non conducting moving parts like AB switch handle, stay wire. erection of dismantled GI fencing using post of 50x6mm angle .2 nos of 11 KV 400A single brake ,TP, gang operated AB switch with operating handle &amp; locking mechanism,2 sets of lightning arrestors and DO fuses ,1 set of 11kv outdoor type CT/PT unit with CT rating suitable as per KSEB, class 0.5,15VACT&amp;11kv/110vclass 0.5 100va PT ,1set of TOD meter in a suitable weather proof sheet steel enclosure in suitable size plinth including Test terminal block, control fuses &amp;10C2.5sqmm/armoured copper cable reconnection etc as required.</p> <p><b>Note</b> .1 The item rate excludes the cost for all civil works like pole foundation &amp; metering cubicle plinth</p> <p><b>Note</b> .2 1 The item rate excluding the supply of items, expect paint for structure cleaning .All other items will be used from the dismantled structure and accessories</p> <p>No damage should be made No extra Amount will be paid at any account during the work</p>

h  
27/05/24



B. N. N.  
27/5/24  
Principal Ilc